


Service Parts Information

MHT-32 VANE MOTORS

MHT-32-**-12


MODEL	RING	BODY (2 REQ'D)	● BEARING (2 REQ'D)	SNAPRING (2 REQ'D)	SHAFT	*PLUG
MHT-32-N1-12	351846	351811	—	—	—	—
MHT-32-R1-12	—	—	353192	351810	359956	7074

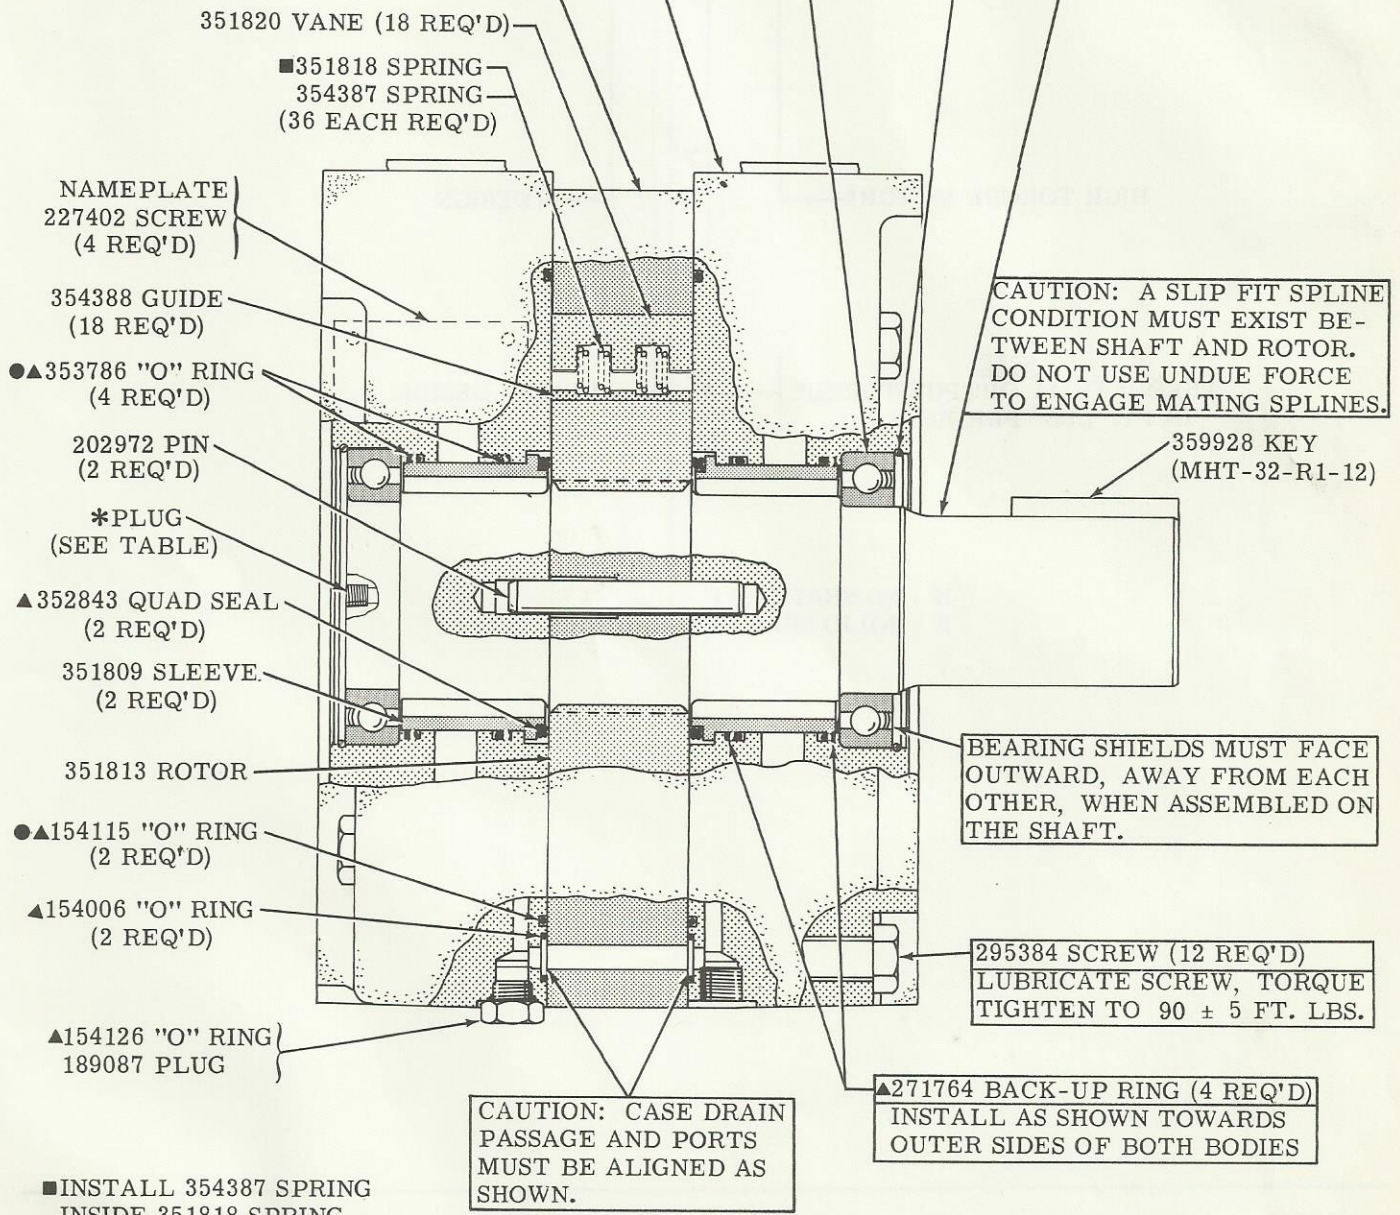

▲ INCLUDED IN GASKET KIT 919771

● USE FIBROUS TYPE WHEEL BEARING GREASE TO PACK BEARINGS, LUBRICATE SPLINES AND INDICATED "O" RING GROOVES.

MODEL CODE BREAKDOWN

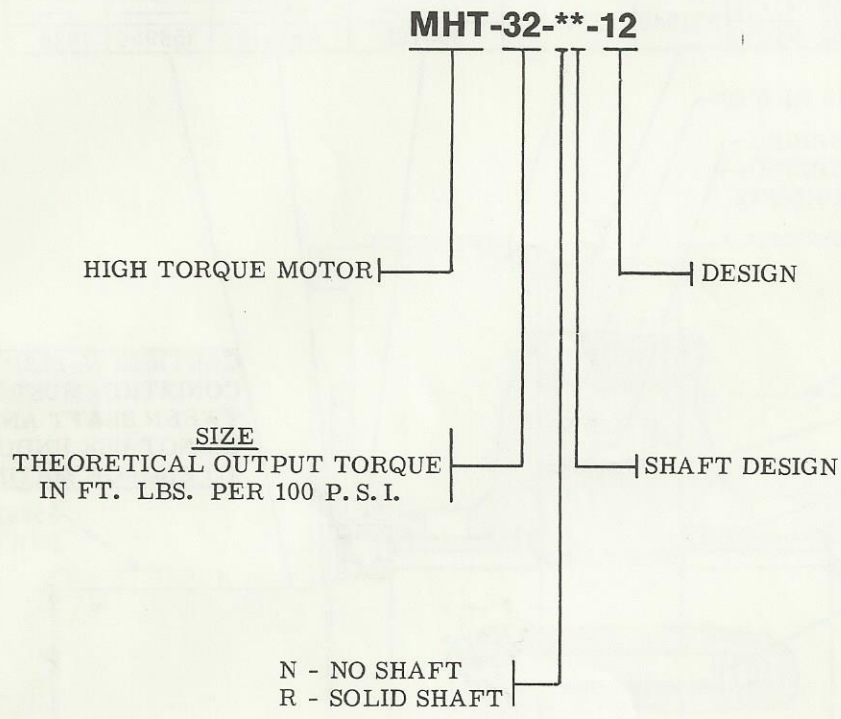

To insure sustained efficiency and maximum trouble-free life of this precision equipment, initial and continuous filtration of the fluid medium to 25 microns or less is essential. (For information pertaining to Vickers economical 10 micron filters, see installation drawing 522140.)