

Service Parts Information

HIGH TORQUE LOW SPEED VANE MOTORS


MHT750-*1-30-S30

WARNING: WEAR SAFETY GLASSES TO PREVENT EYE INJURY.

▲ INCLUDED IN 919881 SEAL KIT


F3 EQUIVALENT SEAL KIT 919882

■ SLEEVES MUST BE .002 BELOW FACE .006 OF BODY.

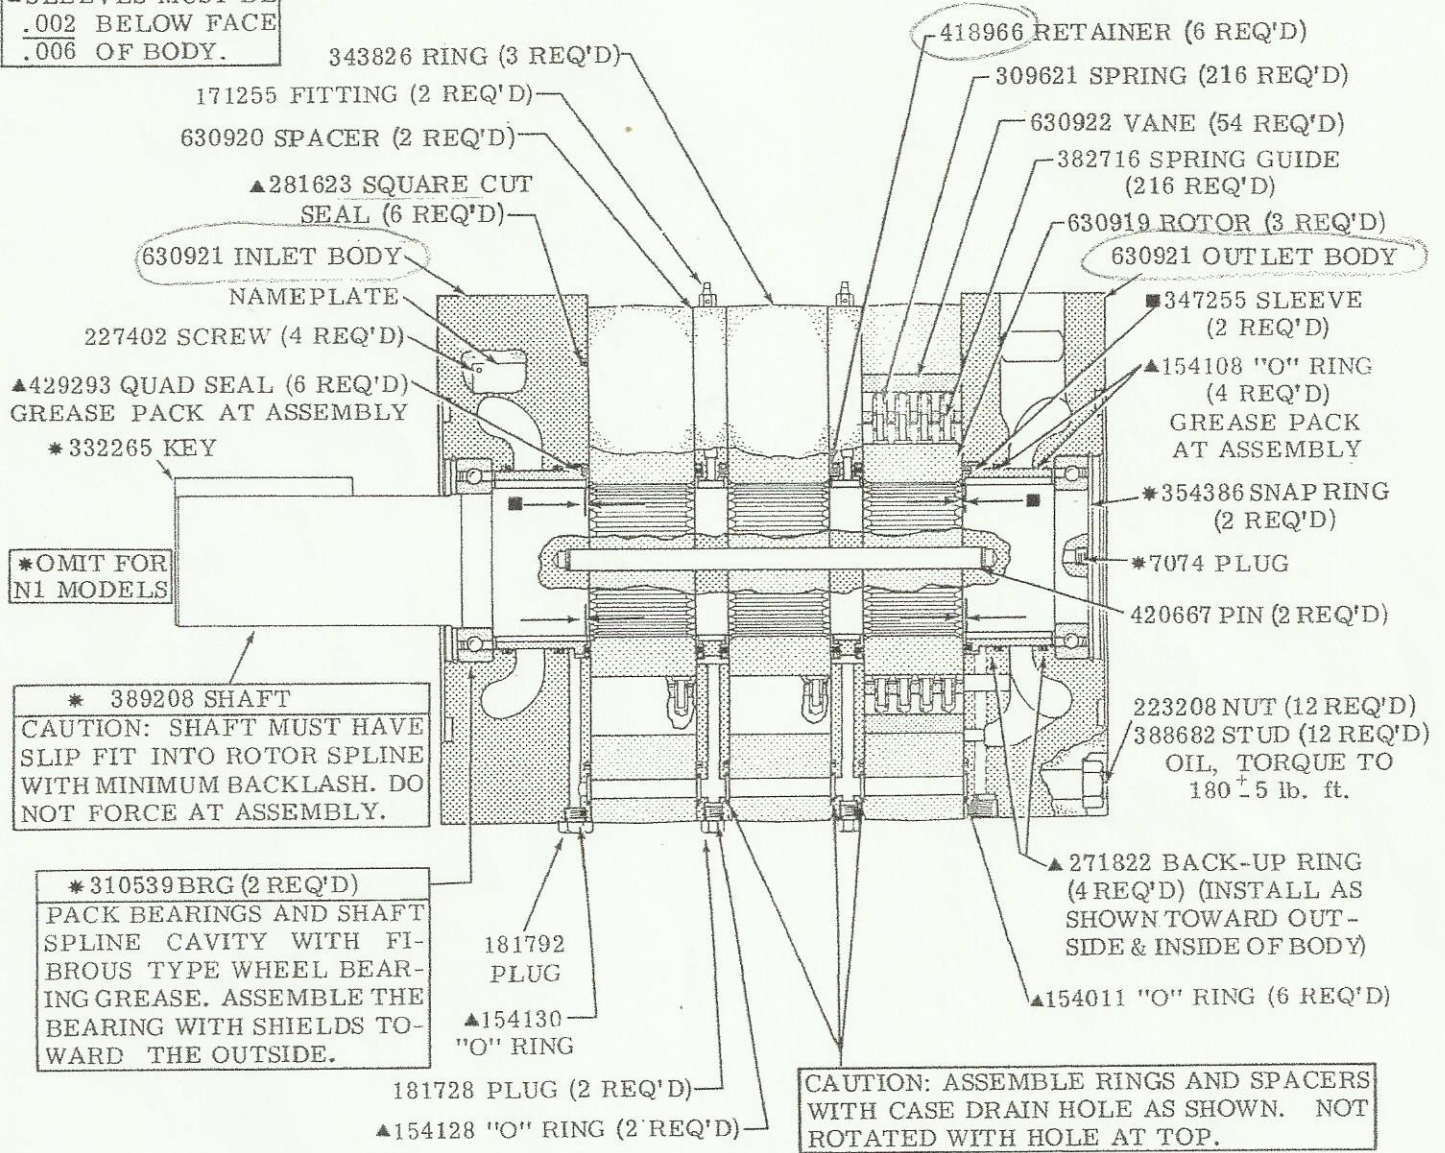

CAUTION: WHEN ASSEMBLING CARTRIDGE, INSERT VANES IN ROTOR SLOTS AT THE MINOR DIAMETER OF CAMRING. ROTATE CARTRIDGE ONE COMPLETE REVOLUTION PRIOR TO ASSY WITH BODIES. THIS PREVENTS MISALIGNMENT OF SPRINGS AND GUIDES. MAKE SURE THE MARKED ROTOR TOOTH OF EACH CARTRIDGE IS IN LINE BEFORE INSTALLATION OF SHAFT.

MODEL CODE BREAKDOWN

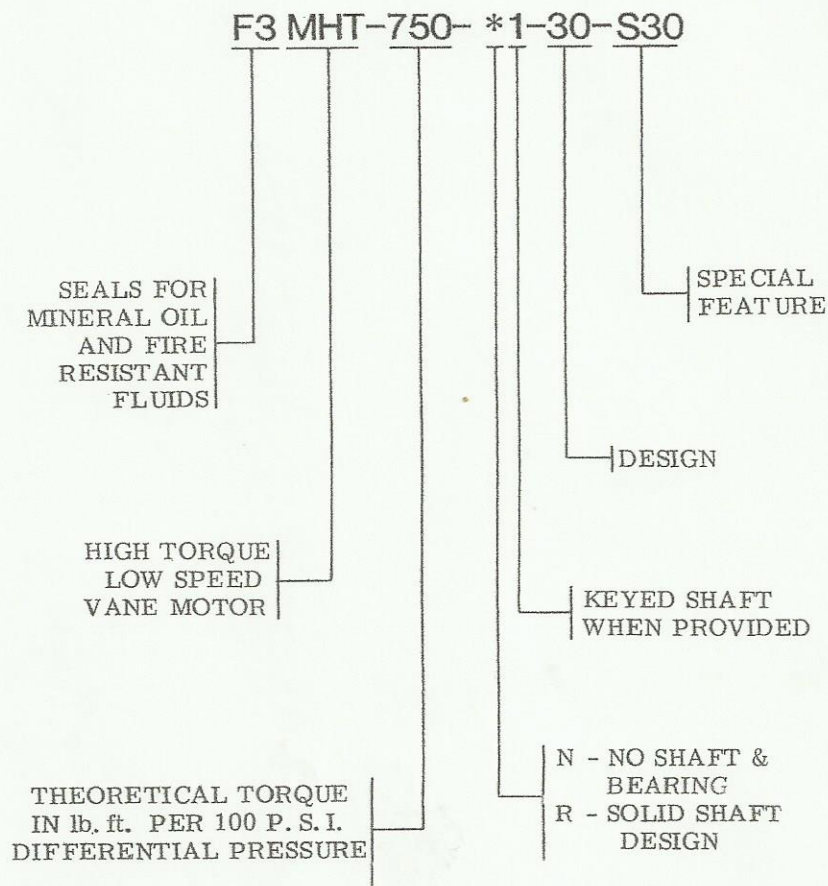

To insure sustained efficiency and maximum trouble-free life of this precision equipment, initial and continuous filtration of the fluid medium to 25 microns absolute or less is essential. (For information pertaining to Sperry Vickers economical filters, see bulletin 81-216.)