




**PVH74/81 Variable Displacement  
Piston Pump - 11 Design**


**Maximum Adjustable Stop – S Option**

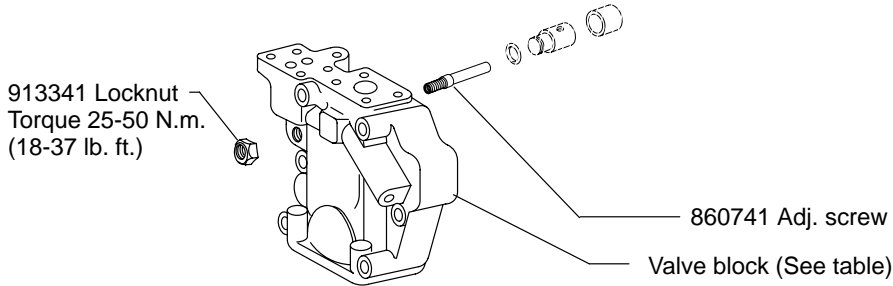


Valve Block Table

Pump Type	RH	LH
F-11-C	928633	928681
M-11-C	928634	928682
SF-11-C	928620	928669
SM-11-C	928621	928670
F-11-CT	860848	860857
M-11-CT	860849	860858

**Torque Limiter – T Option**

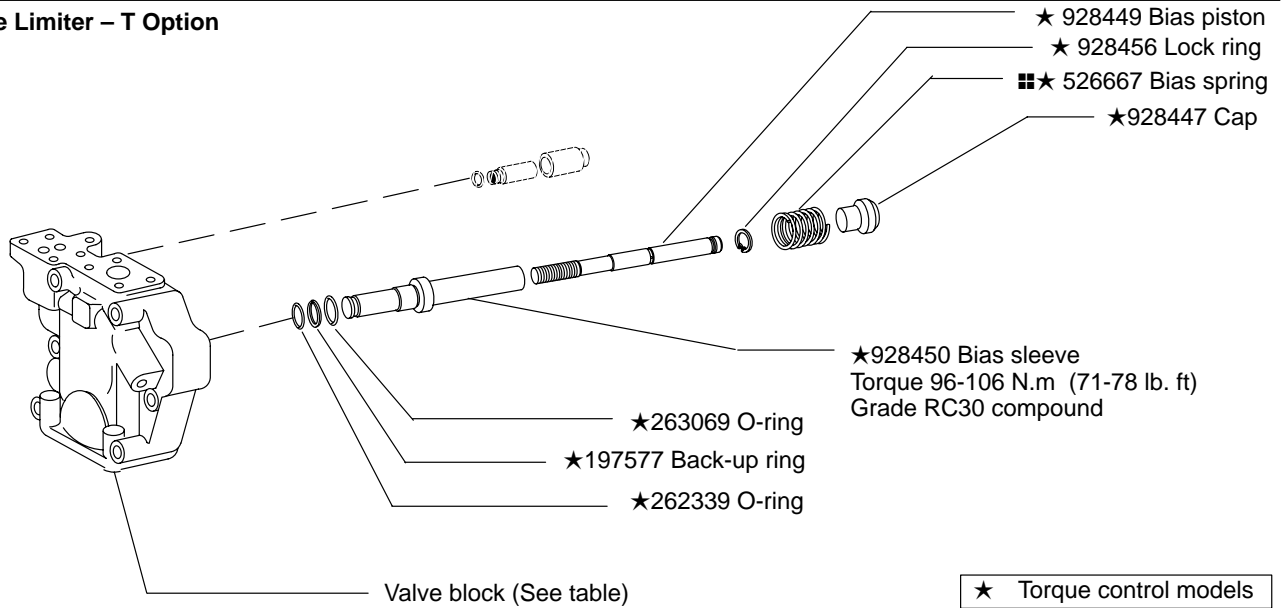

**Standard – C/CM/CMV/CV/IC**

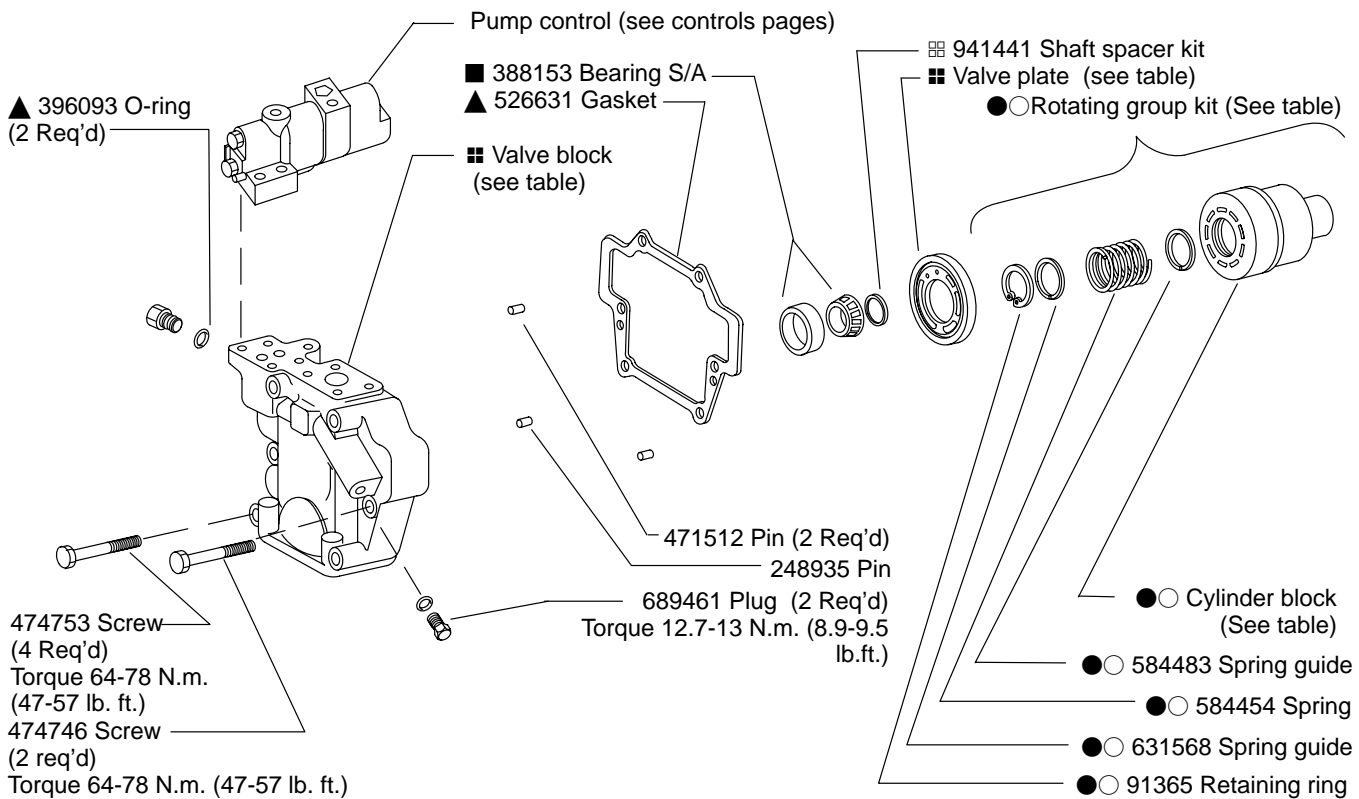


Housing	Flange/Seal
526649	-C-*S
864498	-C-*D
860564	-C2-*S
860814	-C2-*D
864312	-C3-*S
883085	-M-*S

**Note**  
Complete replacement via rotating group kits is recommended.

Model Designation	Piston & Shoe S/A (9 req'd)	Cylinder Block	Shoe Cage	Rotating Group Kit
●74 Size	02-305857	937025	584774	●877421
○81 Size	02-306364	937026	913956	○02-314746

Valve Plate Table		
Pump Type	RH	LH
74	627438	627437
74QI	513889	513890
74QP	913741	N/A
81Q	928405	928406
81QP	928824	N/A

Shaft	Type	Key
692567	1 – Straight keyed	114516
513865	2 – Splined	–
883082	N – Straight keyed	472287
864344	13 – Straight keyed (thru)	140282
883229	2 – Splined (thru-036)	–
864343	3 – Splined (thru)	–

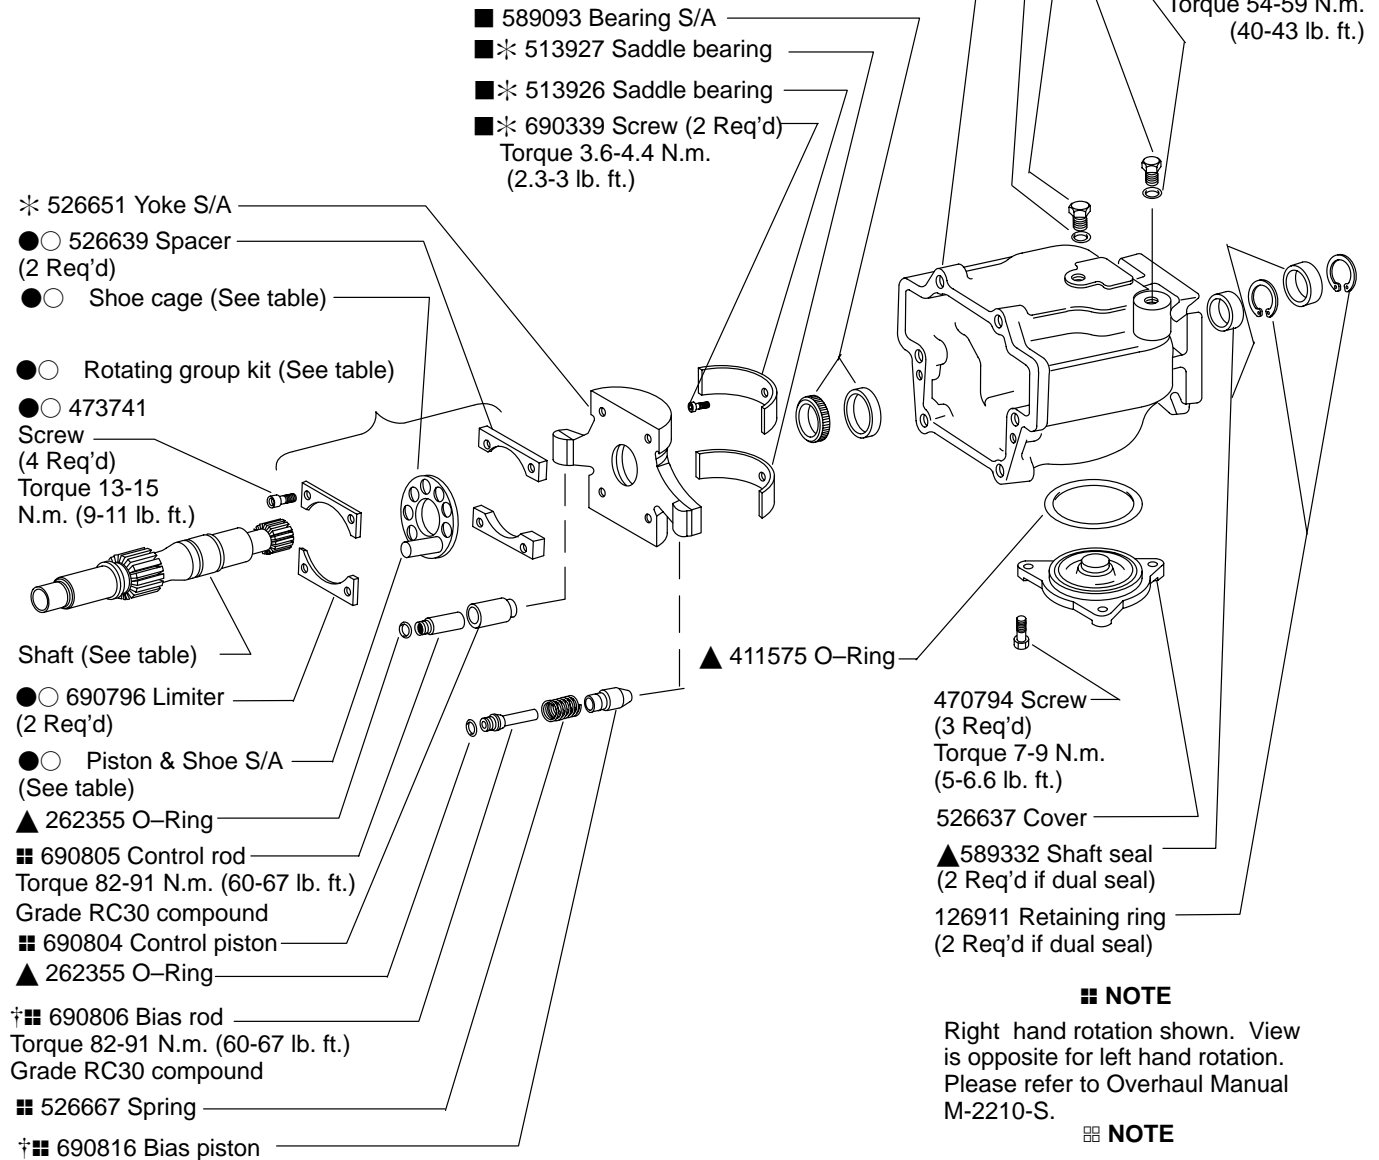

† Non-torque control models

▲ Available in double shaft seal kit 02-102262

■ Available in bearing kit 877424

\* Available in bearing/yoke kit 02-334835

● Available in PVH74 rotating group kit.

○ Available in PVH81 rotating group kit.

**NOTE**

Right hand rotation shown. View is opposite for left hand rotation. Please refer to Overhaul Manual M-2210-S.


**NOTE**

Use shims as required to obtain 0.01–0.10 mm (.0004–.004 in.) axial shaft end play.

**NOTE**

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets cleanliness code 16/14/12 or cleaner.


**Load Sensing & Pressure Compensator Control C(M)\*V**

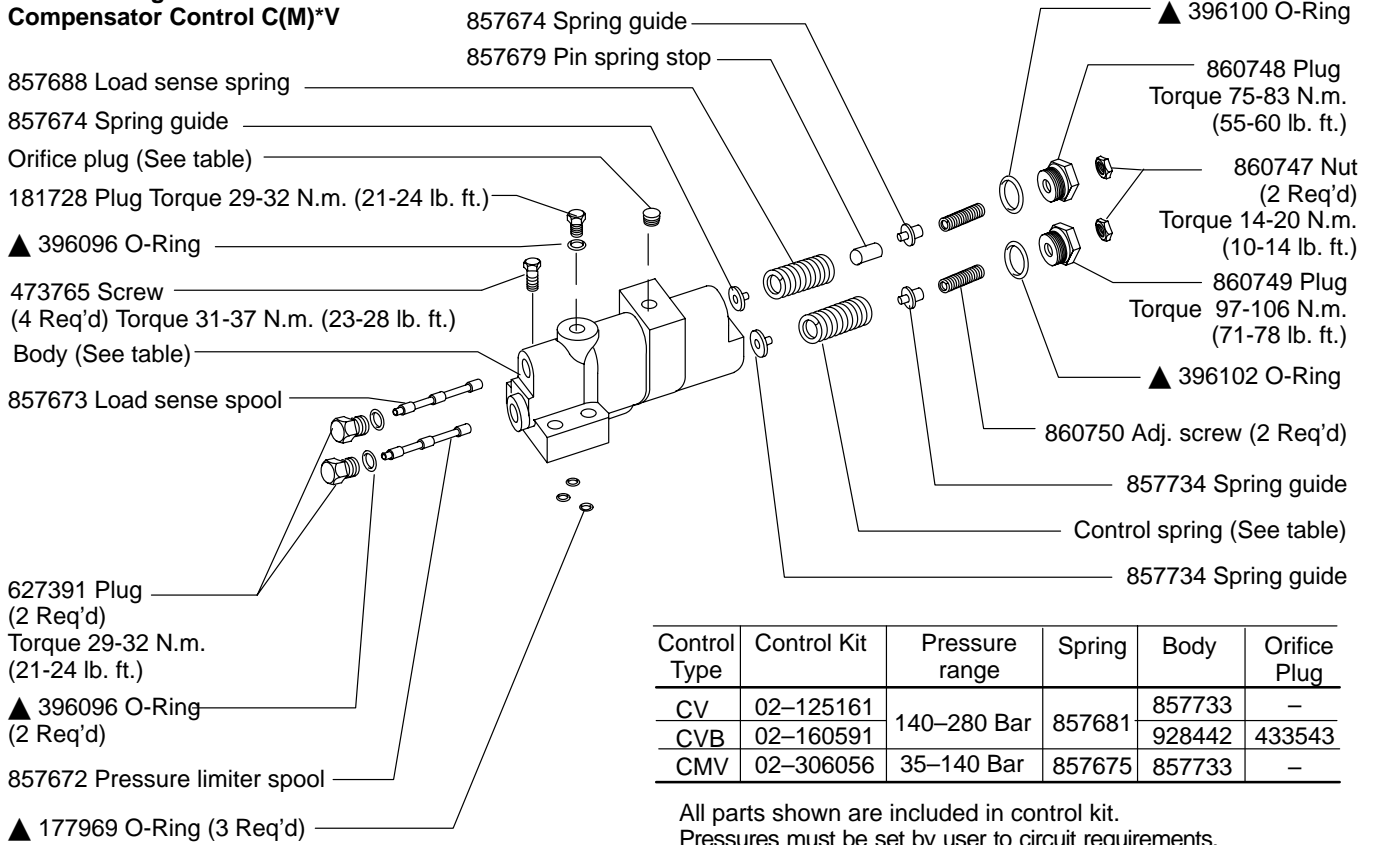

Control Type	Control Kit	Pressure range	Spring	Body	Orifice Plug
CV	02-125161	140-280 Bar	857681	857733	-
CVB	02-160591			928442	433543
CMV	02-306056	35-140 Bar	857675	857733	-

All parts shown are included in control kit.  
Pressures must be set by user to circuit requirements.

**Pressure Compensator Control C & CM**

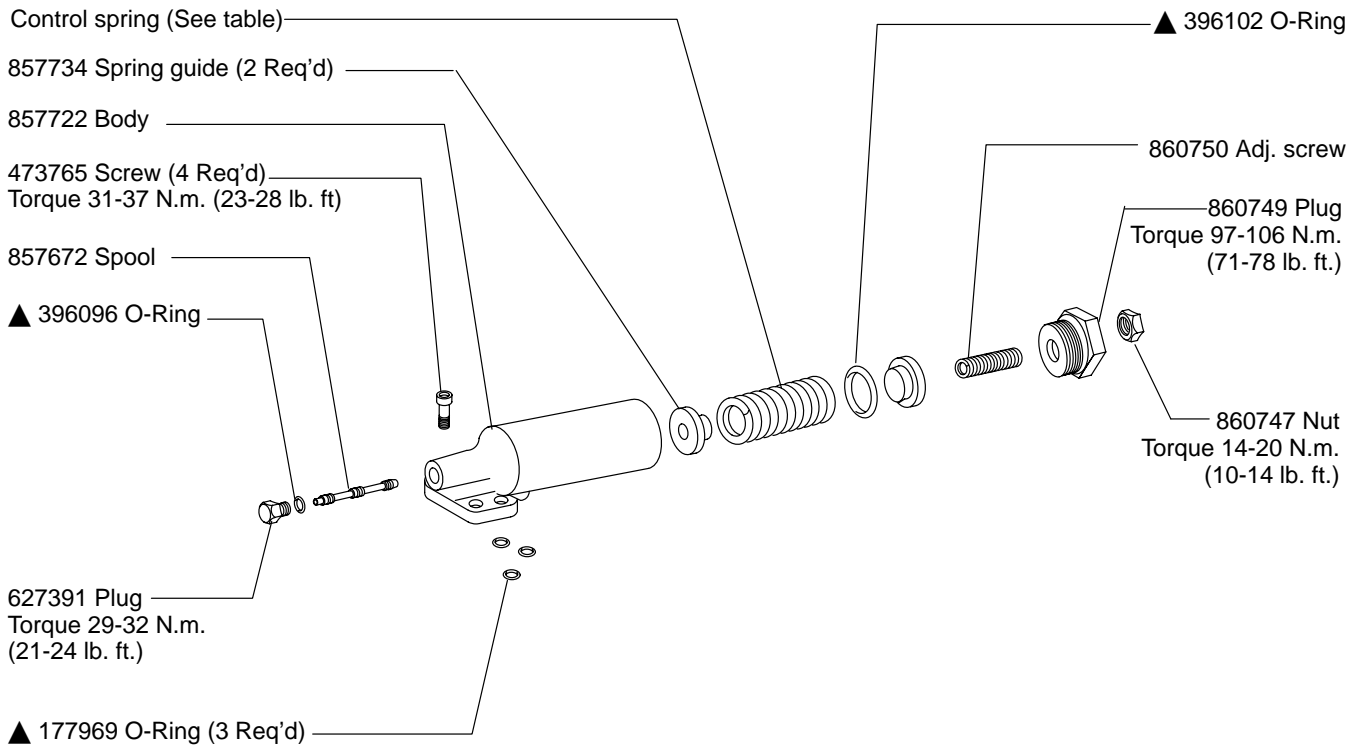

Control Type	Control Kit	Pressure range	Spring
C	02-125160	140-280 Bar	857681
CM	02-125162	35-140 Bar	857675

All parts shown are included in control kit.  
Pressures must be set by user to circuit requirements.

### Industrial Control (IC)

- 473769 Screw (2 Req'd)  
Torque 31-37 N.m. (23-28 lb. ft.)
- 407533 Plug  
Torque 12.1-12.4 N.m. (8.9-9.1 lb. ft.)
- ▲ 396093 O-Ring
- ▲ 396092 O-Ring (3 Req'd)
- 627391 Plug (3 Req'd)  
Torque 9.8-10.2 N.m. (7.2-7.5 lb. ft.)
- Body (see table)
- 857688 Spring
- 857679 Pin spring stop
- 857674 Spring guide (2 Req'd)
- ▲ 396100 O-Ring
- 860747 Nut  
Torque 14-20 N.m.  
(10-14 lb. ft.)
- 860750 Adj. screw
- 860748 Plug  
Torque 75-83 N.m. (55-60 lb. ft.)

Control Kit	Threads	Body
02-151904	inch	883386
02-151905	metric	860628

All parts shown are included in control kit. Pressures must be set by user to circuit requirements.

- (2 Req'd) Torque 31-37 N.m. (23-28 lb. ft.)
- 473765 Screw
- ◇ 113000 Plug  
Torque 5.1-5.9 N.m. (3.7-4.4 lb. ft.)
- 860566 Orifice plug  
Torque 1.7-2.3 N.m.  
(1.2-1.7 lb. ft.)
- ▲ 396096 O-Ring
- ◇ 181728 Plug  
Torque 29-32 N.m.  
(21-24 lb. ft.)
- 627391 Plug  
Torque 29-32 N.m.  
(21-24 lb. ft.)
- ▲ 396096 O-Ring
- 939816 Spool
- ▲ 177969 O-Ring  
(2 req'd)
- ▲ 216630 O-Ring

#### NOTE

IC kits pre-set to 20-30 bar differential pressure with all orifices/plugs in place. Reference Vickers Overhaul Manual M-2210-S for proper orifice/plug configuration in various circuits prior to control installation.


### Torque Limiter – T Option

- 860749 Plug  
Torque 75-83 N.m  
(102-112 lb. ft.)
- 860750 Adjusting Screw
- 860747 Nut  
Torque 8-10 N.m  
(11-14 lb. ft.)
- 1649 Ball
- 471627 Pin
- 937272 Check valve  
Torque 1.7-2.3 N.m  
(2.3-3.1 lb. ft.)
- 217669 O-ring
- 177969 O-ring  
(2 req'd)
- 913454 Spool
- 860653 Body
- 177969 O-ring (5 req'd)
- 577639 Sleeve
- 262356 O-ring
- 248845 Pin
- ◆ 932716 Retainer Ring  
(Screw into bottom of thread)
- 928388 Guide
- Spring (See table)
- 857734 Guide
- 263069 O-ring
- 913453 Guide
- 473773 Screw (4 req'd)  
Torque to 31-37 N.m  
(42-50 lb. ft.)
- 197594 Back-up ring
- 262356 O-ring
- 860655 Plug Torque 75-83  
N.m (102-112 lb. ft.)
- ◆ 248823 Pin
- 186580 Plug  
Torque 54-59 N.m  
(73-80 lb. ft.)
- 263497 O-ring
- 113000 Plug  
Torque 15-17 N.m  
(20-23 lb. ft.)
- ◆ 932716 Connector  
Torque 54-59 N.m  
(73-80 lb. ft.)
- ◆ 263497 O-ring

Model designation	Control Kit	Spring
C**T**-31	02-314944	857675
C**T**S-31	02-335254	857681

◆ Torque summation parts

**\*A\* Thru-drive**

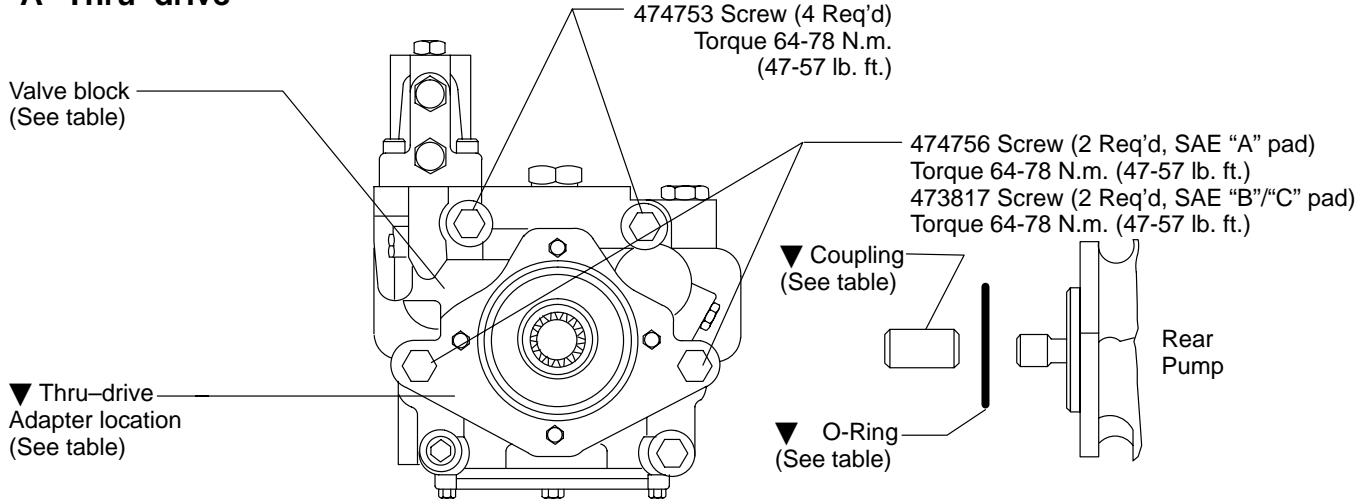

**“A” Thru-drive**

Model designation	Valve block w/ SAE “A” Pad	O-Ring	Coupling Type
LAF-11-C*	928707	576601	864460 9 tooth SAE-A
LAM-11-C*	928708		
RAF-11-C*	928732		
RAM-11-C*	928733		
LAF-11-CT	860839		
LAM-11-CT	860840		
RAF-11-CT	860830		
RAM-11-CT	860831		

**SAE-A, 2-Bolt Cover Plate 939790**  
(Fits -031 Suffix Pumps)

\*AF Units use Screw 170177 (2 req'd)  
\*\*AM Units use Screw 470837 (2 req'd)


**▼“B” & “C” Thru-drive Adapter**

Model Designation	Adapter Pad Kit	Adapter Flange	O-Ring	CouplingTypes
*-BF-11-*	876390	526670	401525	864457 SAE B - 13 tooth
*-BM-11-*	876394	876393		864459 SAE BB - 15 tooth
*-CF-11-*	876389	692934	353264	864458 SAE C - 14 tooth
*-CM-11-*	876392	876391		864461 SAE CC - 17 tooth

**Notes:**

1. “F” type equal SAE threads
2. “M” type equal metric threads
3. “B” and “C” thru-drives created from “A” thru-drive pump with “B” or “C” thru-drive adapter kit installed.
4. All screws/O-rings are included with each “kit” to convert from “A” to “B” or “C” thru-drive unit.

## Typical Cross Section

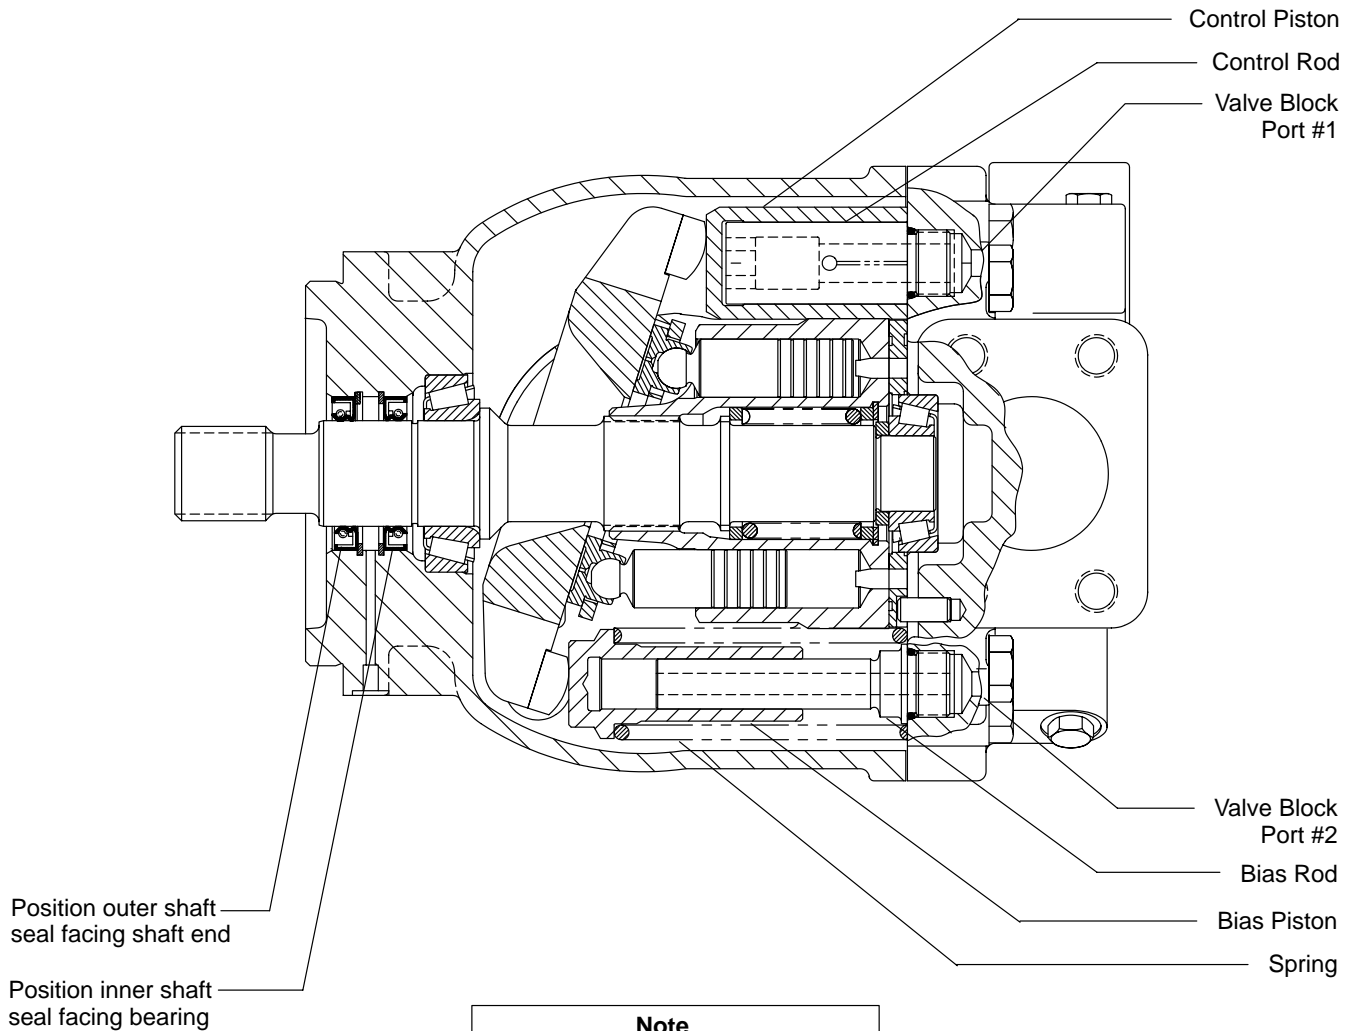

## Pump Startup

Make sure the reservoir and circuit are clean and free of dirt and debris prior to filling with hydraulic fluid.

Fill the reservoir with filtered oil to a level sufficient to prevent vortexing at suction connection to pump inlet. It is good practice to clean the system by flushing and filtering using an external slave pump.

Before starting the pump, fill with fluid through one of the ports. This is particularly important if the pump is above the fluid level of the reservoir.


When initially starting the pump, remove all trapped air from the system. This can be accomplished by loosening the pump outlet fittings or connections before starting the pump, or by using an air bleed valve. All inlet connections must be tight to prevent air leaks.

Once the pump is started, it should prime within a few seconds. If the pump does not prime, check to make sure that there are no air leaks in the inlet line and connections. Also check to make sure that trapped air can escape at the pump outlet.

After the pump is primed, tighten the loose outlet connections, then operate for five to ten minutes (unloaded) to remove all trapped air from the circuit. If reservoir has a sight gage, make sure the fluid is clear—not milky.

Add fluid to the reservoir up to the proper fill level.

# Model Code

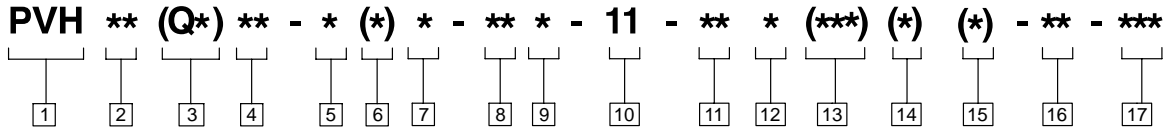

**1 Piston pump, variable displacement**

**2 Maximum geometric displacement**

**74** - 73.7 cm<sup>3</sup>/r (4.5 in<sup>3</sup>/r)  
**81** - 80.9 cm<sup>3</sup>/r (4.94 in<sup>3</sup>/r)

**3 Application style**

**Blank** - Mobile application (rated speed & 250/280 bar (3600-4000 psi) pressures)  
**QI** - Quiet industrial application (1500 - 1800 rpm & 250/280 bar (3600-4000 psi) pressures)  
**QP** - Quiet power unit application (1800 rpm & 140 bar (2000 psi) max. pressures – R.H. rotation only)

**4 Mounting flange, prime mover end**

**C** - SAE "C" 4-bolt type (SAE J744-127-4 )  
**C2** - Optional combination 2- & 4-bolt SAE-C pilot  
**C3** - Optional 4-bolt SAE-C pilot for vertical pump mounting  
**M** - Optional metric 4-bolt pilot ISO 3019/2-125B4HW (Must be used with 'N' shaft option.)

**5 Shaft rotation, viewed at prime mover end**

**R** - Right hand, clockwise  
**L** - Left hand, counterclockwise

**6 Configuration**

**Blank** - Non-thru-drive (single pump)  
**A** - SAE-A thru-drive pump, standard (SAE J744-82-2)  
**B** - SAE-B thru-drive pump, optional (SAE J744-101-2/4)  
**C** - SAE-C thru-drive pump, optional (SAE J744-127-2/4)  
**S** - Adjustable maximum volume stop ("S" option not available on thru-drive and torque control pump models.)

**7 Main ports**

**F** - SAE 4-bolt flange ports (standard)  
**M** - SAE 4-bolt pads with metric mounting bolt threads

**8 Shaft-end type, at prime mover end**

**N** - Metric ISO short straight key (ISO 3019/2-E32N for "M" pilot only)  
**1** - SAE-C straight key  
**2** - SAE-C 14 tooth spline  
**3** - SAE-CC 17 tooth spline  
**13** - SAE-CC straight key

**9 Shaft seal, prime mover end**

**S** - Single, one-way  
**D** - Double, two-way

**10 Pump design number**

**11** - (Subject to change. Installation dimensions unaltered for design numbers 10 to 19 inclusive. )

**11 Pressure control type**

**C** - Compensator, 140-280 bar (2080-4000 psi)  
**CM** - Compensator, 35-140 bar (50-2000 psi)  
**IC** - CETOP 3 interface compensator, 20 bar factory "differential" pressure setting (QI and QP models only)

**12 Factory compensator pressure setting**

**Blank** - Leave blank for "IC" controls only  
**7** - 70 bar (1015 psi) normal "CM7" setting (all pump sizes)  
**23** - 230 bar (3335 psi) normal "C23" setting (63, 81, 106, 141 models)  
**25** - 250 bar (3625 psi) normal "C25" setting (57, 74, 98, 131 models)

**13 Optional pressure control functions**

**Blank** - Leave blank for basic compensator controls of IC models.  
**V** - Load sensing, 20 bar (290 psi) factory "differential" pressure setting  
**T** - Torque limiting control (Used with sections **14** and **15** )  
**VT** - Load sensing with torque limiting  
**VB** - Load sensing with internal bleed down (0.15" dia. orifice)  
**VBT** - Load sensing with internal bleed down and torque limiting

**14 Torque limiting control pressure setting**

**Blank** - Leave blank if no torque limiting control is used  
**4** - Standard minimum 40 bar setting of "T" torque control option

**15 Torque limiting control summation**

**Blank** - Standard torque control  
**S** - Optional torque control with summation feature

**16 Control design number**

**31** - All control options

**17 Special feature suffix**

**031** - Mounting with SAE-A, 2-bolt cover plate  
**036** - #2 "C" spline shaft in thru-drive pumps\*\*\*



**\*\*\*CAUTION**

Maximum shaft input torque must not exceed 5660 lb-in.



**Eaton**  
Fluid Power Group  
Hydraulics Business USA  
14615 Lone Oak Road  
Eden Prairie, MN 55344  
USA  
Tel: 952-937-9800  
Fax: 952-294-7722  
[www.eaton.com/hydraulics](http://www.eaton.com/hydraulics)

**Eaton**  
Fluid Power Group  
Hydraulics Business Europe  
Route de la Longeraie 7  
1110 Morges  
Switzerland  
Tel: +41 (0) 21 811 4600  
Fax: +41 (0) 21 811 4601

**Eaton**  
Fluid Power Group  
Hydraulics Business Asia Pacific  
11th Floor Hong Kong New World Tower  
300 Huaihai Zhong Road  
Shanghai 200021  
China  
Tel: 86-21-6387-9988  
Fax: 86-21-6335-3912