


Pressure Reducing Valves

X(C)T-10-**-30
X(C)S-10-**-30

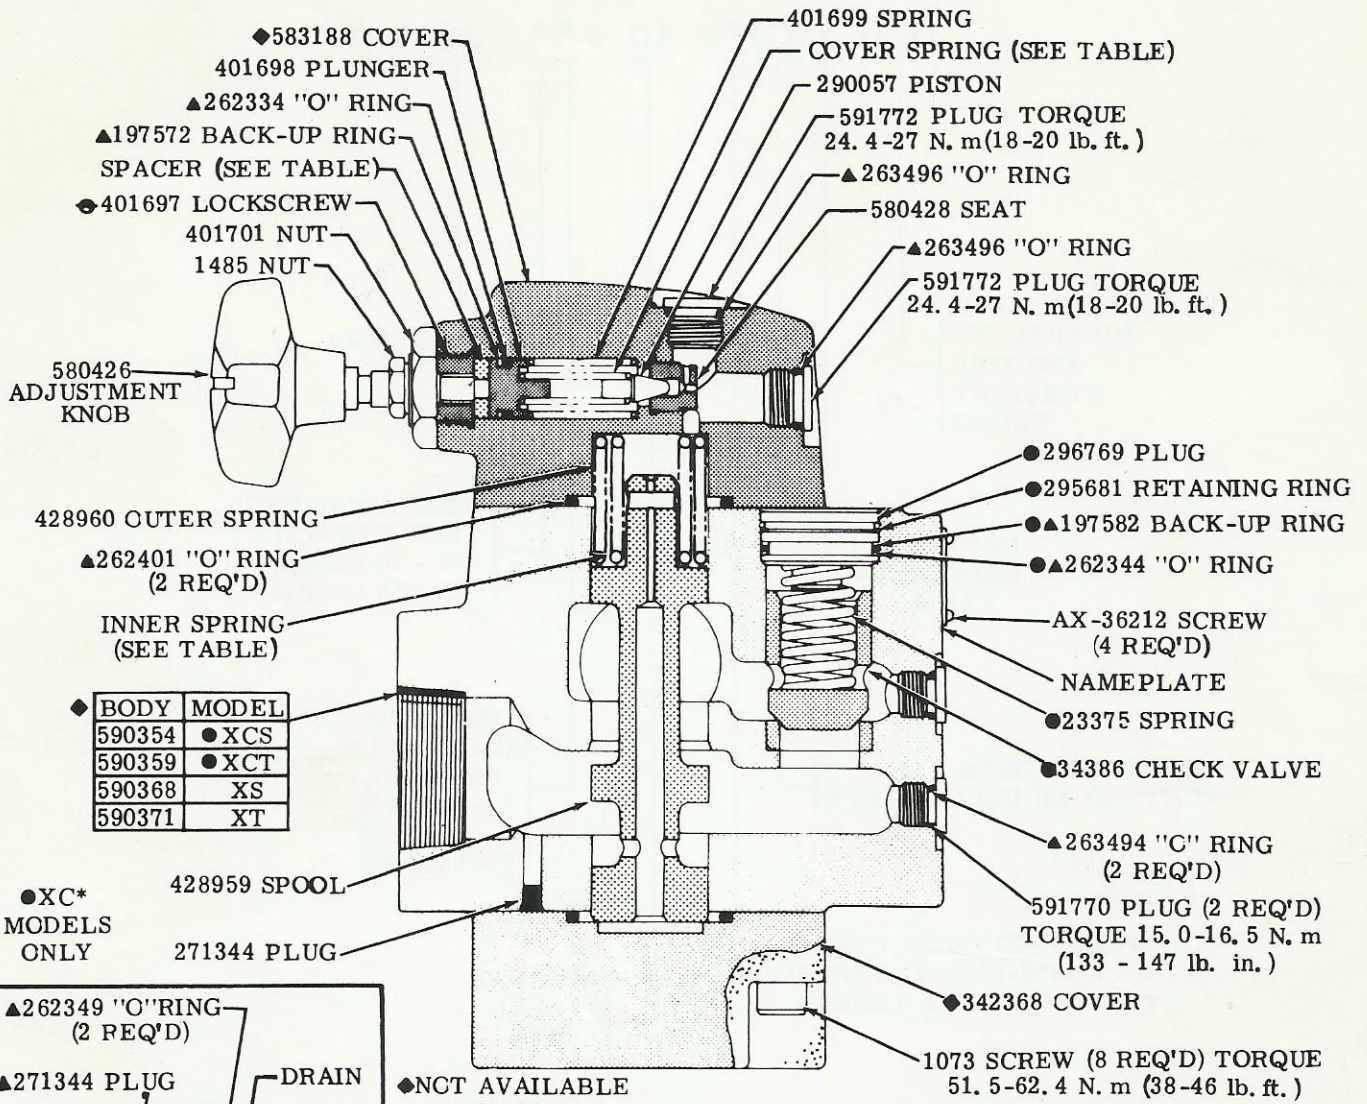

◆NCT AVAILABLE FOR SALE


MODEL	INNER SPRING	COVER SPRING	SPACER	PRESSURE RANGE PSI	RATED FLOW USGPM
X(C)*-10-1B-30	—	2280		100-1000	25
X(C)*-10-1F-30	428961			165-1000	50
X(C)*-10-2B-30	—	583937		225-1000	75
X(C)*-10-2F-30	428961			100-2000	25
X(C)*-10-3F-30		401700	386715	165-2000	50
				225-2000	75
				225-2850	75

▲SERVICE ALL UNITS W/F3 SEAL KIT 919852

◆INSTALL LOCKSCREW WITH STEPPED O. D. END TOWARD SPACER OR PLUNGER AS SHOWN



MODEL CODE BREAKDOWN

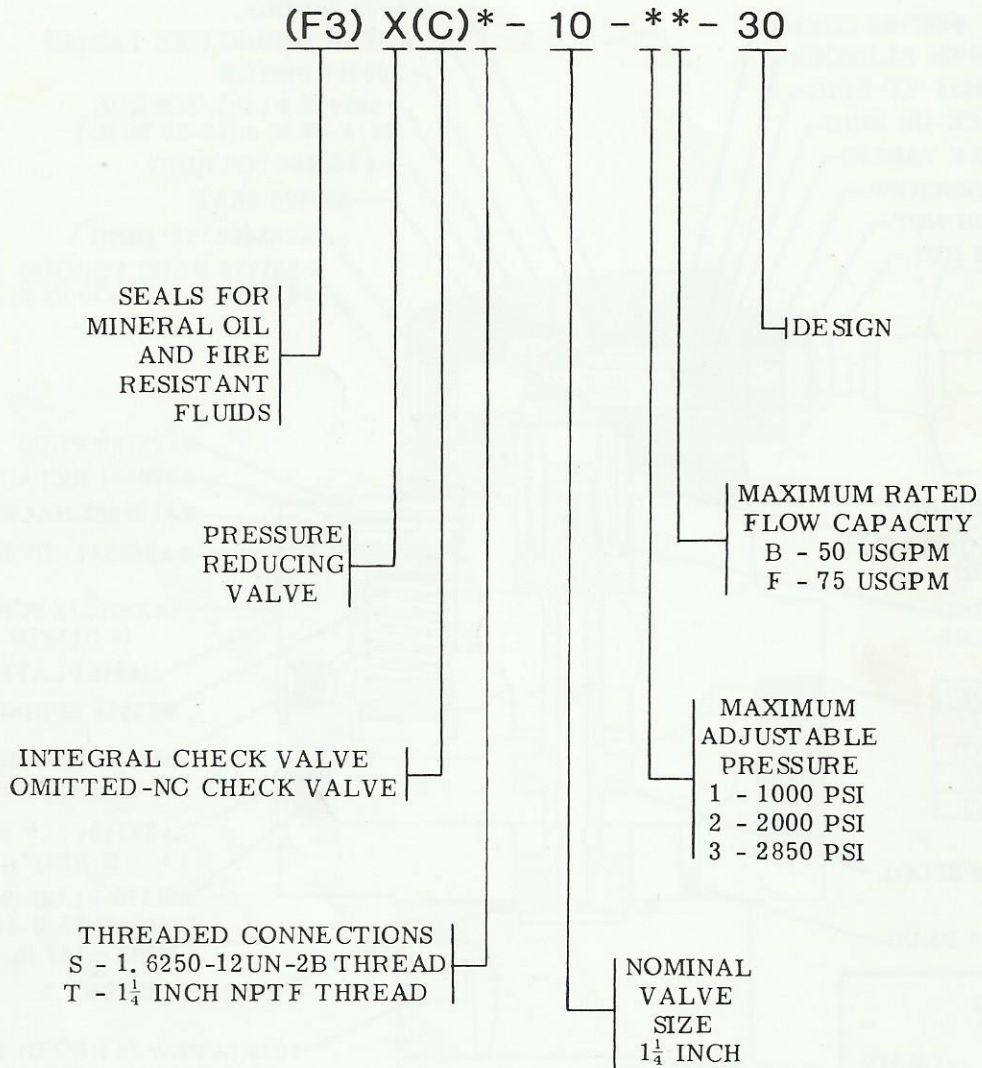

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Vickers OFP, OFR, and OFRS series are recommended.