


Service Parts
Information

PRESSURE REDUCING VALVES
LOW PRESSURE SERIES



XGL-03-B-10

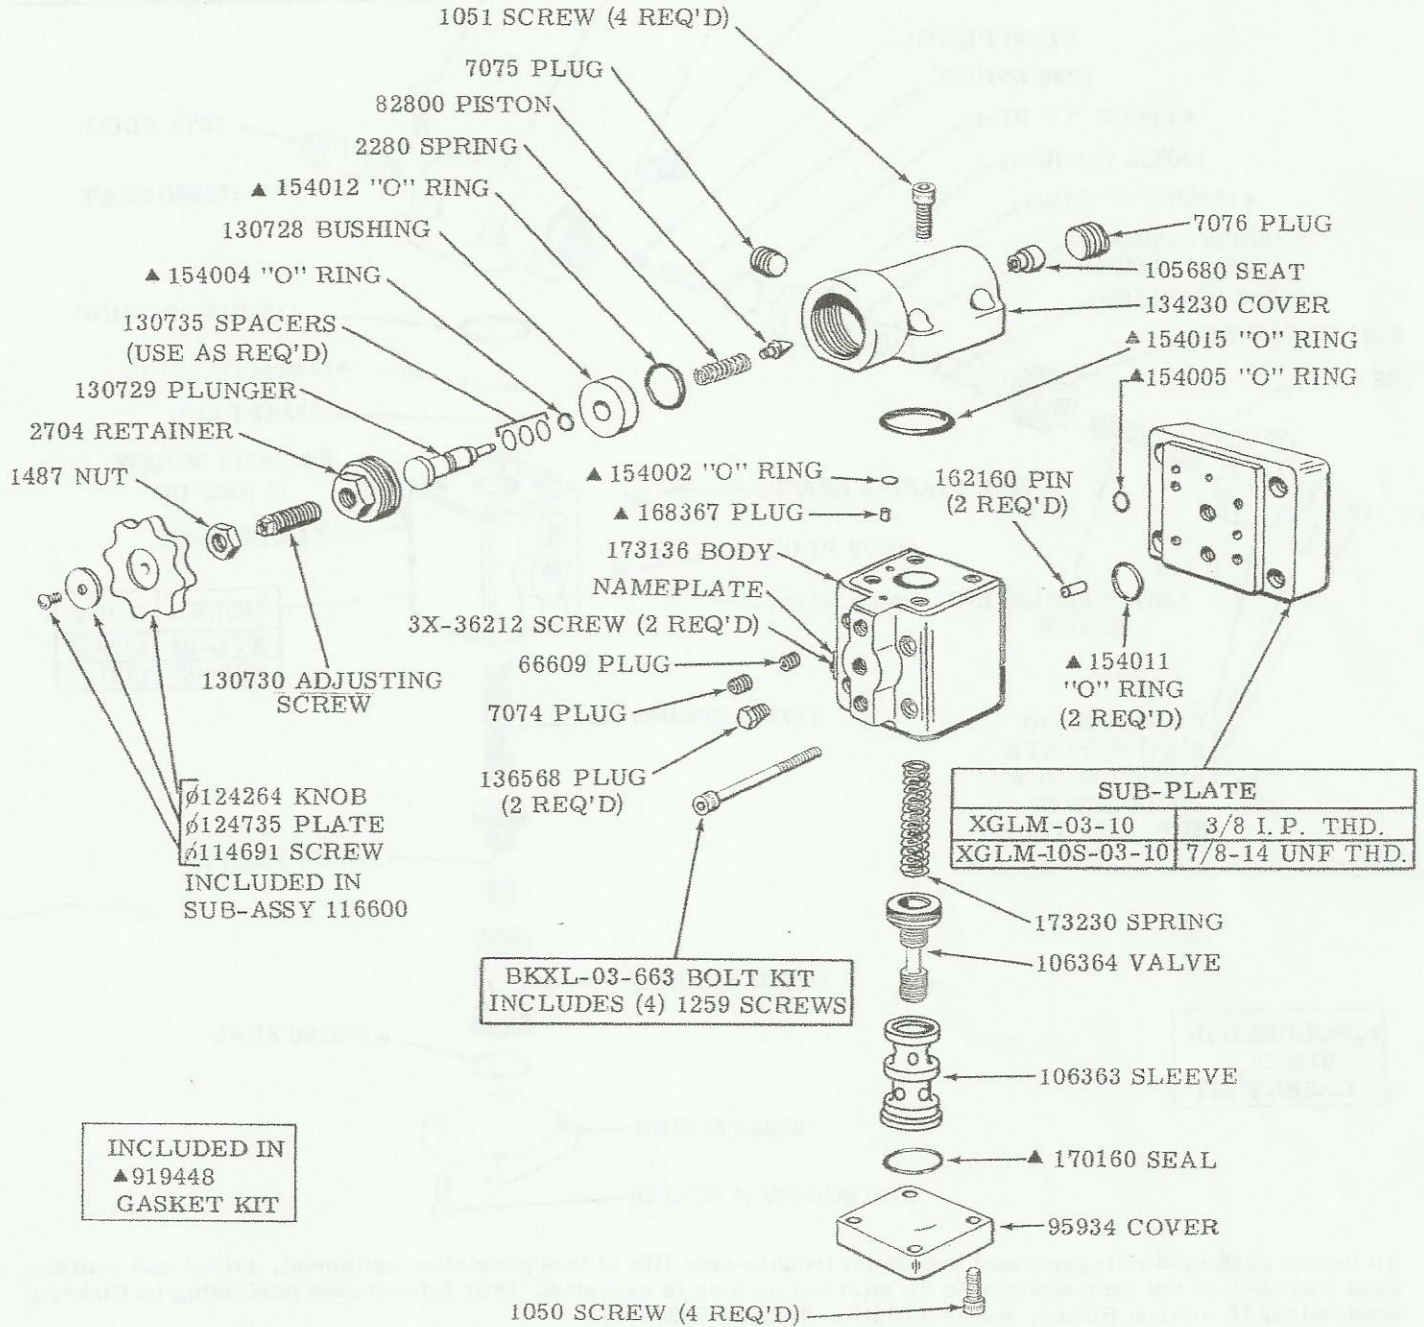

XTL-03-B-10 NOMINAL PIPE THREAD 3/8"

XSL-03-B-10 14 SAE STRAIGHT THREAD 7/8"

MODEL	PLUG	SEAL	COVER	SCREW (4 REQ'D)
XTL-03	16127	—	134230	
XSL-03	191362	▲154128	191363	1051

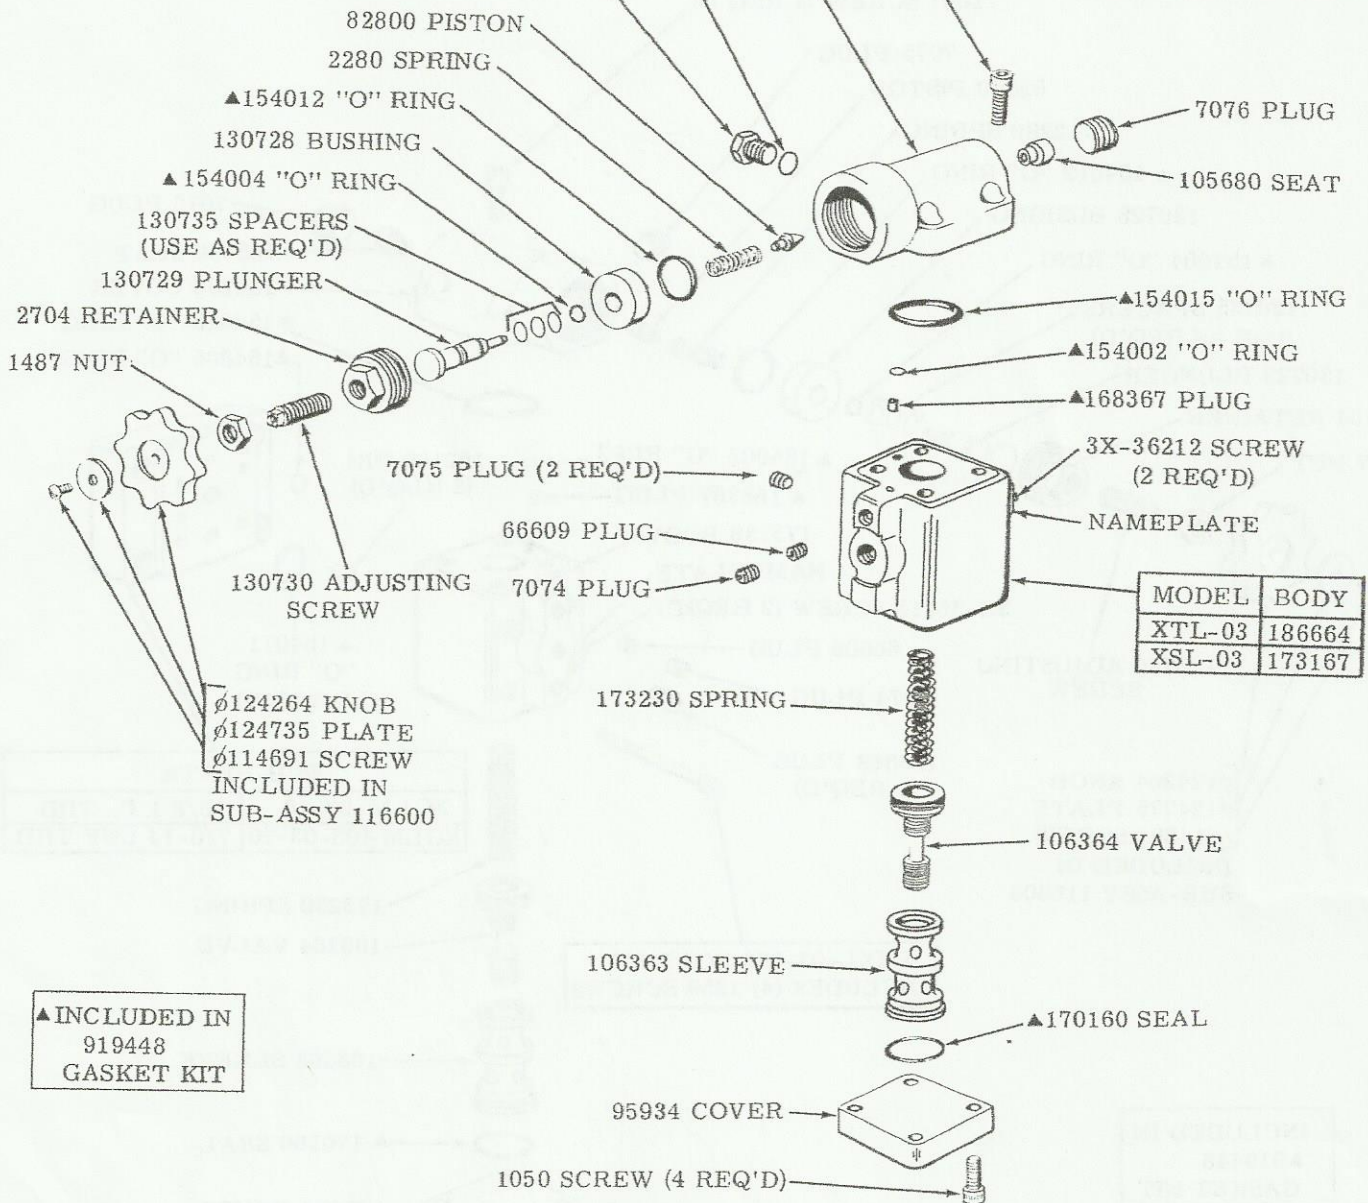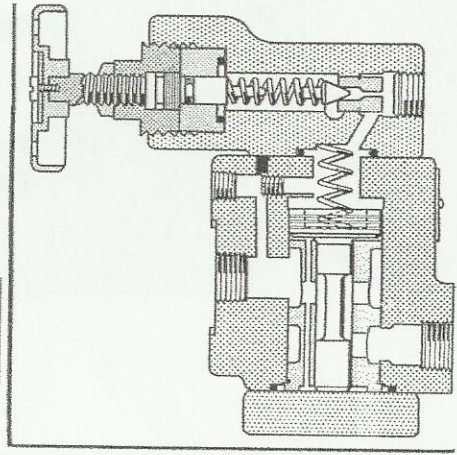

MODEL	BODY
XTL-03	186664
XSL-03	173167

∅124264 KNOB
∅124735 PLATE
∅114691 SCREW
INCLUDED IN
SUB-ASSY 116600

▲INCLUDED IN
919448
GASKET KIT

To insure sustained efficiency and maximum trouble-free life of this precision equipment, initial and continuous filtration of the fluid medium to 25 microns or less is essential. (For information pertaining to Vickers economical 10 micron filters, see installation drawing 522100.)